




Applications

For spraying of wet mortar, mixed concrete, and other wet products. Used as a service hose between pump and nozzle in transporting plaster, grout, and ready mixed concrete.

Advantages

- High working pressure.
- Light weight, flexible and easy to handle.
- Abrasion resistant tube.

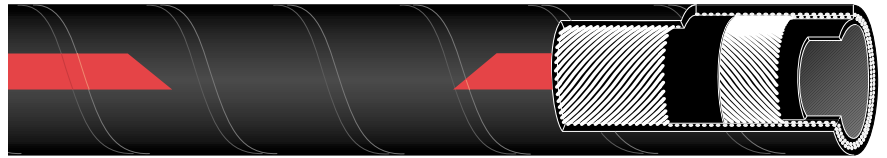

Technical description

Inner tube: wear resistant NR, black, smooth.

Reinforcement: synthetic textile.

Cover: weather and wear resistant SBR, black, fabric impression.

Temperature range: -30 °C to +70 °C.

Electrical properties: conductive tube $R < 2 \cdot 10^6 \Omega/m$.

Special properties: abrasion resistance $< 70 \text{ mm}^3$ of tube according to DIN 53 516.

Branding: by transfer stripe showing a discontinuous of red trapeziums with:



TRELLEBORG

printed in black on each trapezium

and

PROJECTOR 100

printed in red between trapeziums.

Complementary information

13.3 m lengths available on request, min. order is three pieces and by multiple of three.

Other wall thickness and/or bursting pressure on request.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
25.0	7.0 +0 / -1	39.0 ± 1.0	40	100	100	0.87	40	61494	●
32.0	8.0 +0 / -1	48.0 ± 1.0	40	100	150	1.24	40	127153	1
35.0	6.5 +0 / -1	48.0 ± 1.0	40	100	180	1.06	40	61496	●
38.0	10.0 +0 / -1	58.0 ± 1.0	40	100	180	1.84	40	127156	1
40.0	10.0 +0 / -1	60.0 ± 1.0	40	100	200	1.92	40	127170	1
50.0	7.5 ± 0.7	65.0 ± 1.5	40	100	370	1.64	40	127179	1
50.0	9.0 ± 0.7	68.0 ± 1.5	40	100	280	2.04	40	61501	●
60.0	10.0 ± 0.7	80.0 ± 1.5	40	100	340	2.72	40	127183	2
65.0	10.0 ± 0.7	85.0 ± 1.5	40	100	380	2.93	40	61500	●

● = Stock item.

1 = Non stock, mini. quantity = 400 m.

2 = Non stock, mini. quantity = 200 m.