




Applications

For cleaning and shot blasting castings, metal, stone, and concrete surfaces.

Advantages

- Small tolerances, therefore easy to couple.
- Longitudinally stable i.e. the length will not alter under pressure (unstable hoses result in the operator losing control when pressure is applied).
- Light weight and flexible for easy handling.
- Conductive inner tube compound gives increased safety for the operator, since there is no risk of wire breakage in use.

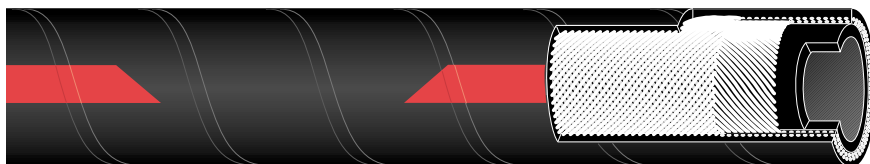

Technical description

Inner tube: wear resistant NR, black, smooth.

Reinforcement: synthetic textile.

Cover: weather and wear resistant SBR, black, fabric impression.

Temperature range: -30 °C to +70 °C.

Electrical properties: conductive tube $R < 2.10^6 \Omega/m$.

Special properties: abrasion resistance $< 70 \text{ mm}^3$ of tube according to DIN 53 516.

Branding: by transfer stripe showing a discontinuous of red trapeziums with:



TRELLEBORG

printed in black on each trapezium

and

SABLEX

printed in red between trapeziums

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
13.0	7.0 ± 0.5	27.0 ± 1	12	40	65	0.58	20	28711	●
							40	28712	●
16.0	7.0 ± 0.5	30.0 ± 1	12	40	80	0.68	20	28719	1
							40	28720	1
19.0	7.5 ± 0.5	34.0 ± 1	12	40	100	0.78	20	28745	●
							40	28746	●
20.0	7.0 ± 0.5	34.0 ± 1	12	40	110	0.74	20	60958	1
							40	60959	1
25.0	7.0 ± 0.5	39.0 ± 1	12	40	125	0.86	20	60969	●
							40	60970	●
32.0	8.0 ± 0.5	48.0 ± 1	12	40	160	1.30	20	60971	●
							40	60972	●
32.0	11.0 ± 0.5	54.0 ± 1	12	40	140	1.85	20	70785	1
							40	70786	1
35.0	9.0 ± 0.5	53.0 ± 1	12	40	190	1.57	20	70787	1
							40	70788	1
38.0	10.0 ± 0.5	58.0 ± 1	12	40	170	1.89	20	70789	●
							40	70790	●
40.0	10.0 ± 0.5	60.0 ± 1	12	40	180	1.97	20	28786	●
							40	28787	●
42.0	9.0 ± 0.5	60.0 ± 1	12	40	240	1.81	20	70791	1
							40	70792	1
50.0	8.0 ± 0.5	66.0 ± 1	12	40	300	1.87	20	70793	1
							40	70794	1
50.0	10.0 ± 0.75	70.0 ± 1.5	12	40	250	2.36	20	60973	●
							40	60974	●
63.0	10.0 ± 0.75	83.0 ± 1.5	12	40	325	2.90	20	28844	2
							40	60077	2
65.0	9.0 ± 0.75	83.0 ± 1.5	12	40	340	2.64	20	70795	2
							40	70796	2
65.0	10.0 ± 0.75	85.0 ± 1.5	12	40	320	2.95	20	70797	2
							40	70798	2
76.0	10.0 ± 0.75	96.0 ± 1.5	12	40	400	3.42	20	28851	2
							40	70784	2
102.0	10.0 ± 0.75	122.0 ± 1.5	12	40	550	4.40	20	28859	2
							40	28860	2

● = Stock item.

1 = Non stock, mini. quantity = 400 m.

2 = Non stock, mini. quantity = 200 m.